

Platform Trailers

Designed for the rough. Thought-out down to the last detail.

www.boeckmann.com



FIRST CLASS TRANSPORT





Designed for the rough. Thought-out down to the last detail.

The passion for innovative transport solutions has been our driving force for more than 60 years. With a clear goal: Our aim is to build trailers that will make your job easier and work, no matter what. Every day. That's why the development of the new platform trailers once again focused on the needs of demanding private and professional users. And the following pages show the outcome of that process. We hope you will enjoy it!

Kon Book

Contents

| Quality | 04 |
|--------------------------|----------|
| Added values | 06 |
| Base Class Pro Class | 08 12 |
| Accessories | 16 |
| Technical specifications | 21 |

Quality. Nothing done by halves.

Böckmann utility trailers are true workhorses. They have been developed for the toughest applications and everything about them says stability and longevity. Whether you are an ambitious DIY enthusiast or a seasoned professional – you will see what a Böckmann trailer is all about when it comes down to tough applications: well thought-out engineering combined with ingenious detail solutions. Always with a clear focus on the customer's needs to build trailers of the highest quality and functionality. Test it and convince yourself. First, check out the following pages and then visit your local Böckmann partner. He will answer all your questions!





Added values. Base Class.

Original Böckmann quality for all platform trailer models. This means: Longevity and a particularly high resale value due to the use of high-quality materials and solid workmanship throughout.



Rattle-free lashing brackets

Four rattle-free lashing brackets in the side panel with a spring for the secure cargo lashing – additional lashing options can be retrofitted.



Hinges Tool-free removal of sidewalls due to solid cast iron hinges on the aluminium sidewalls..



Steel corner posts

are used to install a front ladder rack, steel grass rails or frame with canvas. Screwed and pluggable, easy to remove for unobstructed loading.



Large loading volume Full utilization of the loading area with 300 mm high aluminium sidewalls.

Added values. Pro Class.



Three locking variants

Böckmann standard platform trailers give you a choice: Long-stroke locking device (01), lightweight toggle fastener (02, up to an inner width of 2100 mm) or adjustable professional toggle fastener (03). For more information, see page 19.



New rattle-free and countersunk lashing bracket system

The new innovative Böckmann lashing bracket system simplifies securing a load. It is spring-mounted, rattle-free, easy to lock and it disappears into the floor when not in use and thus is out of the way.

Prepared rail shafts

NEW

The pro class standard platform trailers are prepared for receiving drive-on rails. This makes retrofitting easy.

RIGHTS

Highlights of the basic version. Base Class.

The sturdy standard base class platform trailers can be loaded quickly and easily from all sides as the sidewalls are hinged on all sides. This applies to both versions with and without brakes. The proven aluminium quality makes the base class models with a payload of more than one ton the perfect partner for smaller transport tasks.

4 steel corner posts

are used to install a front ladder rack, steel grass rails or frame with canvas. Screwed and pluggable, easy to remove for unobstructed loading.

4 attached lashing brackets

for the secure cargo lashing – additional lashing options can be retrofitted.


Hinged aluminium foldable sidewalls on all 4 sides, 300 mm

for comfortable loading and unloading from all sides

Overview of model variants

| L x W (mm) Inside dimensions | Model | Total weight (kg) |
|---------------------------------|---------------------|-------------------|
| 2560 x 1400 | Single-axle trailer | 750/1350/1500 |
| 2560 x 1650 | Single-axle trailer | 1350/1500 |
| 2560 x 1650 | Two-axle trailer | 2000 |
| 3060 x 1650 | Two-axle trailer | 2000 |

Additional basic versions are shown on the following pages. Further Technical details can be found in the tables on page 21. Trailers shown may include special accessories.

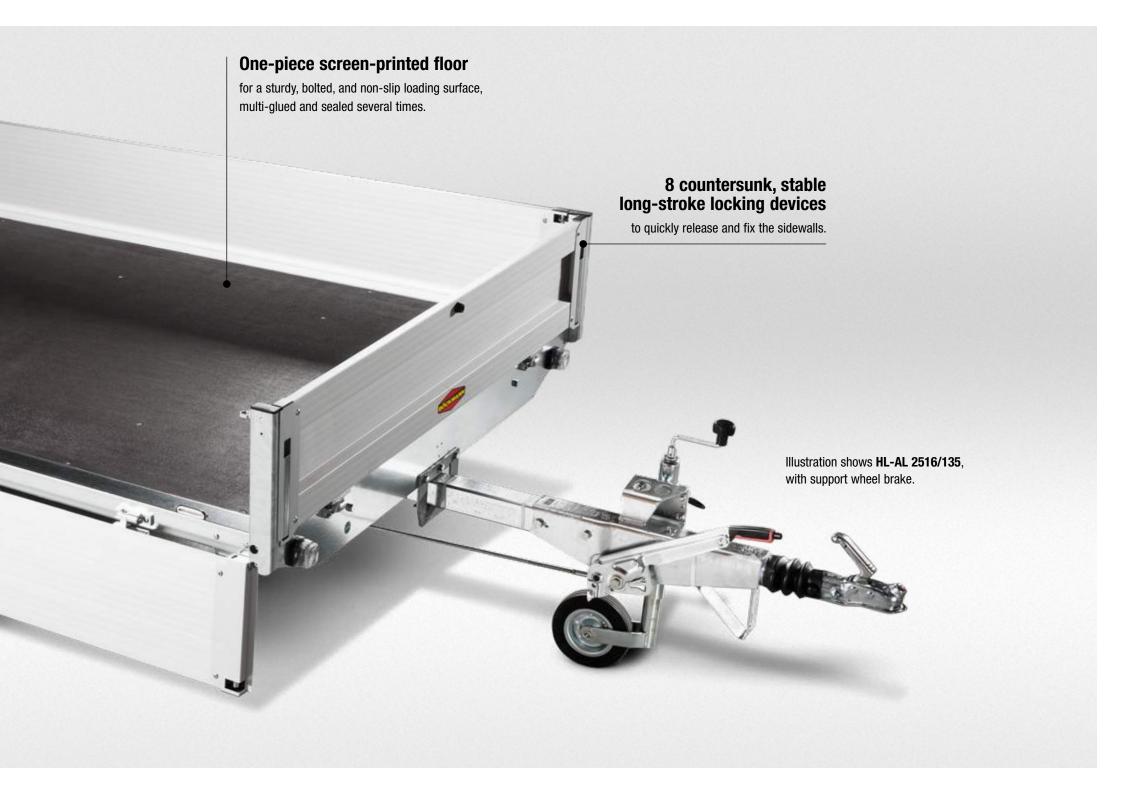

Basic equipment. Base Class.



Long-stroke locking device to safely and quickly release and fix the sidewalls.



Robust chassis construction

The standard platform trailer design includes a torsion-resistant and galvanized base frame with a solid steel profile bridge and a maintenance-free rubber spring axle with independent suspension – for outstanding maintenance and service friendliness under extremely high loads.





Low loading height

The platform trailers of the basic class are equipped with special tyres as standard. This reduces the loading height down to max. $610\,\text{mm}.$



Rattle-free lashing brackets

Four rattle-free lashing brackets in the side panel with a spring for secure cargo lashing – additional lashing options can be retrofitted.



Foldable sidewalls on all 4 sides for comfortable loading and unloading from all sides



Stable light carriers The stable light carriers with bump stops on each side protects the lighting from damage by the rear flap.



Jockey wheel for a safe stand and quickly winding up the trailer (accessory for single-axle trailers).



Configure online now: www.boeckmann.com

Highlights of the basic version. Pro Class.

The standard pro class platform trailer models let you handle any heavy haulage with ease. They are specially designed for high demands and perfectly suited for the comfortable transport of heavy loads. Divided sidewalls are part of the basic equipment from a superstructure interior length of 5 meters. The sturdy and value-stable standard pro class platform trailer leave nothing to be desired.

Overview of model variants

| L x W inside dimensions (mm) | Total weight (kg) |
|------------------------------|---------------------|
| 3240 x 1800 | 2000/2700/3000/3500 |
| 3740 x 1800 | 2000/2700/3000/3500 |
| 4140 x 1800 | 2700/3000/3500 |
| 4140 x 2100 | 2700/3000/3500 |
| 5140 x 1800 | 2700/3000/3500 |
| 5140 x 2100 | 2700/3000/3500 |
| 6240 x 2100 | 2700/3000/3500 |
| 6240 x 2450 | 2700/3500 |

Additional basic versions are shown on the following pages. Further Technical details can be found in the tables on page 21. Trailers shown may include special accessories.

4 steel corner posts

are used to install a front ladder rack, steel grass rails or frame with canvas. Screwed and pluggable, easy to remove for unobstructed loading.

NEW Prepared rail shafts

below the loading area make retrofitting drive-on ramps easy.

Available in 2 loading heights

The standard pro class platform trailers are optionally available in 2 loading heights (HL-AL / HL-AL-F).

1-1

Foldable sidewalls on all 4 sides, 350 mm

for comfortable loading and unloading from all sides

High quality tires for high driving comfort, available as 14" or 13" tires.



Handle for telescopic crank supports

Telescopic crank supports with handle are available as accessories.

Automatic jockey wheel

for a safe stand and quickly winding up the trailer.

Illustration shows **HL-AL 5121/27**, braked with automatic jockey wheel; accessory: wheel on front wall and telescopic crank supports.

Reinforced supporting yoke

for additional protection of drawbar and coupling.

NEW Countersunk lashing bracket system for a simplified securing of loads and for professional and safe lashing.

Basic equipment. Pro Class.



New rattle-free and countersunk lashing bracket system

The new innovative Böckmann lashing bracket system simplifies securing a load. It is spring-mounted, rattle-free, easy to lock and it disappears into the floor when not in use and thus is out of the way.



Sidewalls

Hinged sidewalls on all 4 sides for comfortable loading and unloading. The galvanized and easily replaceable steel end stanchions safely support tarpaulin and roof bows.



Prepared rail shafts

The Böckmann standard pro class platform trailers are prepared for receiving drive-on rails. This makes retrofitting easy.



Robust chassis construction

The standard platform trailer design includes a torsion-resistant and galvanized base frame with a solid steel profile bridge and a maintenance-free rubber spring axle with independent suspension – for outstanding maintenance and service friendliness under extremely high loads.



13" tires and axle support (low loading height)

The HL-AL-F models are equipped with 13" tires and a special axle support. Due to the low loading height and the resulting low ramp angle they can easily transport construction machinery or vehicles. For fast loading and unloading.



Impact-resistant, recyclable plastic mudguards The standard HL-AL trailers are equipped with an impact-resistant, recyclable plastic mudguard (HL-AL-F series with two mudguards).




Jockey wheel

The standard profi class platform trailers come standardly with an autom. jockey wheel and a robust coupling (3.5 t total weight with a solid cast iron coupling).



Divided sidewalls Divided sidewalls are part of the basic equipment of standard platform trailers from a superstructure interior length of 5 meters.

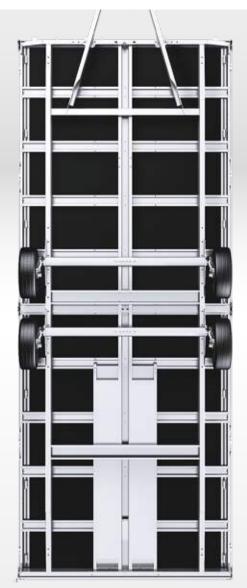

Longitudinal and cross members

The solid side rails and crossmembers are bolted together and additionally riveted to each other and to the outside frame.



Configure online now: www.boeckmann.com

Accessories. Original Böckmann.

The original Böckmann range of accessories offers many equipment options to individually adapt each standard platform model to your needs. For additional accessories, please visit our website or contact your local Böckmann partner. Your Böckmann partner will be pleased to help you!




Storage case

The lockable storage case is very spacious with 440 x 150 x 210 mm and can be loaded with 20 kg max.



Drive-on rails

The original Böckmann aluminium drive-on rails make loading vehicles easier. The load capacity per pair is 2000 kg or 2700 kg. Always observe the permissible total weight or payload of your trailer. We recommend using the drive-on rails in conjunction with supports.






Transport locking device Use sidewall gallery (01) and shut-off bars with anchor rail (02) to securely lashing the cargo. The front ladder rack (03) increases transport and driving safety – especially when transporting tall goods.



C-rail for window transport Crystal clear: C-rails (only crosswise) for the installation of window racks.



Spare wheel The spare wheel can be mounted in different locations. Your Böckmann Partner will assist you!

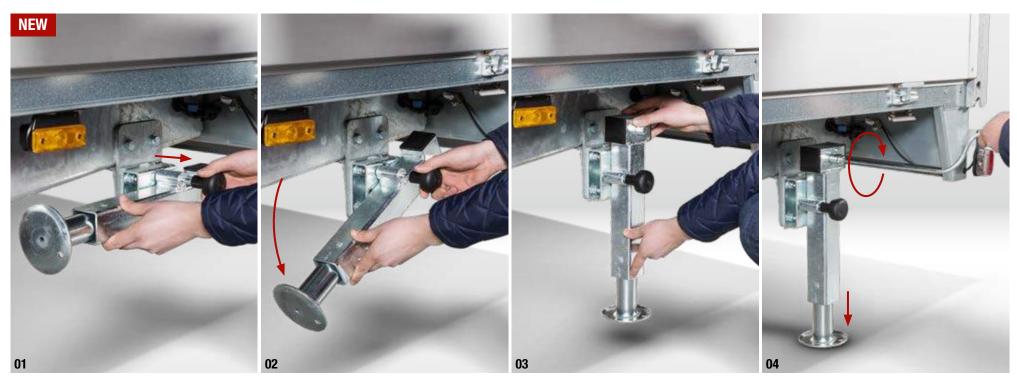

New telescopic crank drop legs

The new telescopic crank drop legs for the standard platform trailers accelerate and simplify securing trailer: Pull out the safety knob (01), fold down the telescopic crank drop leg (02) and firmly lock it (03). Crank until the support firmly secures the trailer (04). Plug in the supplied crank and simply turn it.




Extended sidewalls increase the height from 300/350 to 500 mm -



Sidewalls

Use the side walls to precisely lash the cargo (up to 150 kg).

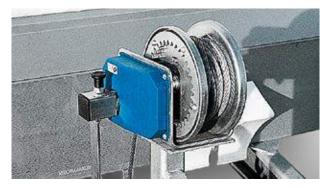

Winch Robust, mechanical winch with winch base, for comfortable and safe loading and unloading.



Canvas systems

Extended sidewalls

for massive payloads*.

The PVC-canvas and frame construction (01) with optional sliding canvas (02) safely protects your cargo from the influence of weather. Other canvas colours and heights as well as foldable canvas and frame constructions are available. You also can order individual lettering. Your Böckmann partner will be pleased to help you!







01

Long-stroke locking device (basic equipment)

The long-stroke locking device (integrated in the sidewalls) to quickly release and fix the sidewalls is part of the basic equipment of all standard platform trailers.

NEW



NEW



Lightweight toggle fastener (accessory)

The lightweight toggle fastener (mounted onto the sidewall, available for pro class) reliably and safely secures the sidewalls against unintentional opening.

NEW



NEW



Professional toggle fastener (accessory)

The pro toggle fastener (integrated in the sidewalls, available for pro class) is adjustable and secures the sidewalls professionally. The sidewalls with professional toggle fastener are smooth, leaving more space for your individual lettering.

Accessories. At a glance.

2514



| Shock absorber | • | ٠ | • | ٠ | ٠ | ٠ | • | • | ٠ | • | • |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Drawbar extension (1.75 m / 2 m) | × | × | × | × | × | × | • | × | • | • | • |
| Height-adjustable drawbar (from 2.7 t total weight) | × | × | × | ٠ | • | • | • | • | • | • | • |
| DIN drawbar eye (only in conjunction with height-adjustable drawbar) | × | × | × | ٠ | • | ٠ | • | • | • | • | • |
| Spare wheels and mounts | • | • | ٠ | • | • | • | • | • | • | • | • |
| Storage case 1 (splash-proof) | • | • | • | • | • | • | • | • | • | • | • |
| PVC-canvas and frame 1000 mm | • | • | × | × | × | × | × | × | × | × | × |
| PVC-canvas and frame 1300 mm | • | ٠ | × | × | × | × | × | × | × | × | × |
| PVC-canvas and frame 1500 mm | × | • | • | ٠ | • | • | • | • | • | • | • |
| PVC-canvas and frame 1700 mm | × | × | • | ٠ | • | • | • | • | • | • | • |
| PVC-canvas and frame 1900 mm | × | × | × | ٠ | • | • | • | • | • | • | • |
| PVC-canvas and frame, foldable at one side | • | • | • | ٠ | • | • | • | • | • | • | • |
| Sliding canvas, can be pushed away on one side (from HL-AL 5121 / HL-AL 6224 with centre post) | • | • | • | • | • | • | • | • | • | • | • |
| Steel grass rails | • | ٠ | • | • | ٠ | • | • | × | × | × | × |
| C-rail (only crosswise) embedded in floor | • | • | • | • | • | • | • | • | • | • | ٠ |
| Extended sidewalls from 300/350 to 500 mm ² | • | • | • | • | • | • | • | • | • | • | • |
| Box attachment ² | • | • | • | • | • | • | • | × | × | × | × |
| Lightweight toggle fastener | × | × | × | ٠ | • | • | • | • | • | • | × |
| Professional toggle fastener | × | × | × | ٠ | • | • | • | • | • | • | • |
| Aluminium checker plate on the floor | • | • | • | ٠ | • | • | • | • | • | • | • |
| Galvanized sheet steel on floor | • | • | • | ٠ | • | • | • | • | • | • | ٠ |
| Sidewalls, galvanized | • | • | • | ٠ | • | • | • | • | • | • | • |
| Front ladder rack, galvanized | • | • | • | ٠ | • | • | • | • | • | • | • |
| Aluminium drive-on rails, can be put underneath the loading surface | × | • | • | ٠ | • | • | • | • | • | • | ٠ |
| Telescopic crank supports ³ | • | • | • | • | • | • | • | • | • | • | • |
| Jockey wheel | • | • | ~ | • | • | • | • | • | • | • | • |
| Automatic support wheel | • | • | • | ~ | ~ | ~ | ~ | ~ | ~ | ~ | ~ |
| | | | | | | | | | | | |

¹⁾ Not in combination with telescopic crank supports, for HL-AL 2516 only possible for single-axle trailer up to 1500 kg

²⁾ The front ladder rack cannot be completely hinged with extended sidewalls and mounted storage case, not available in

combination with sidewall gallery.

³⁾ All standard platform trailers from 3218 are equipped with the new telescopic crank supports.

The unladen weight (basic weight) is increased when accessories are added. The payload is reduced as a result.

Please refer to our price list for a full catalogue of accessories. Your Böckmann partner will be pleased to help you!

✓ Already included as a standard feature

Available as accessory

× Not possible

| Model Length With Height Park With Park With Park With | Technical | | Superstr | Superstructure inside dimensions | | | Total | | | | Loading | |
|--|--------------------|---------------------|----------|----------------------------------|-----|----------------|-----------|------------------|---------------------------------------|-------|---------|------------------|
| Base Class Hud. Sign13p.15 S260 H00 | specifications. | Model | | | | Centre post | weight | Payload in kg | Jockey wheel | Tires | height | Overrun brake |
| Base Class H.u. 2519115/15 250 1400 900 ne 132911500 10891197 ysis 12' 600 H.u. 2519112/155 250 1600 300 no 132911500 10891197 ysis 12' 660 H.u. 251920 250 1600 300 no 2000 1614 ysis 12' 660 H.u. 2516120 2500 1600 300 no 2000 1614 ysis 12' 660 H.u. 211620 727 3240 1800 300 no 20002700 1442214 autim< | | | | | | | | | | | | |
| H-4.4 2516133 /15 2560 1650 300 no 1350/1501 1054/157 jets 12' 650 H-4.4 25162.0 2560 1650 300 no 2000 1514 jets 12' 650 H-4.4 25162.0 500 1650 300 no 2000 1514 jets 13' 680 H-4.4 301620 500 1650 300 no 2000/10 1541 jets 13' 680 H-4.3 301620 /27 3240 1800 350 no 2000/27/0 1440/2134 autom. 14'' 700/740 H-4.3 301800 /35 3240 1800 350 no 2000/27/0 1440/2134 autom. 14'' 755/70 H-4.3 201800 /35 3240 1800 350 no 2000/27/0 1429/216 autom. 14'' 755/70 H-4.3 201800 /35 7340 1800 350 no 2000/27/0 1429/216 autom. 13'' 680 H-4.3 201800 /35 1440 1800 350 no 2000/27/0 1429/216 <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>-</td> <td></td> <td>no</td> | | | | | | | | | | - | | no |
| H 0 1560 1600 900 no 1014 yms 13" 660 H 4.2 516/20 2600 1600 300 no 2000 1610 yms 12" 660 H 4.3 016/20 306 1600 300 no 2000 1581 yms 12" 650 H 7.5 5776 3240 1800 300 no 2000/270 14/2/14 autom. 14" 700/740 Professional Class H 4.216/20/27 3240 1800 300 no 2000/270 14/2/14 autom. 14" 755/70 Professional Class H4.3218/20/27 3740 1800 50 no 2000/270 14/2/14 autom. 13" 660 H4.3178/20/27 3740 1800 350 no 2000/270 14/2/19 410" 755/70 H4.3178/20/27 3740 1800 350 no 2000/250 2010/250 autom. 13" 660 | Base Class | | | | | | | | · · · · · · · · · · · · · · · · · · · | | | yes |
| HL 4, 2516/20 F 2500 160 900 no 2000 1610 yes 12" 680 HL-4, 2016/20 / 27 F 3060 1650 300 no 2000/270 1578/267 yes 12" 680 Professional Class HL-4, 2016/20 / 27 F 3240 1800 350 no 2000/2700 144/07134 autom. 14" 700 / 700 Professional Class HL-4, 2216/03/5 3240 1800 350 no 2000/2700 144/2746 autom. 14" 700 / 700 HL-4, 2216/03/5 3240 1800 350 no 2000/2700 142/2716" 370 700 / 700 HL-4, 2716/20 / 77 3740 1800 350 no 2000/2700 1419/2719 autom. 14" 755/70 HL-4, 3716/20 / 75 3740 1800 350 no 2000/2700 1419/2719 autom. 14" 765/70 HL-4, 3716/20 / 75 3740 1800 350 no 3000/3500 2239/2 | | | | | | | | | | | | yes |
| H-L4. 2919/20 3060 1601 300 no 2000 1511 yms 13" 680 HL-/HL-F Series M-AL 221/20 (27 F 3240 1000 350 no 2000/2700 1440/2134 autom. 14" 760/70 Professional Class M-AL 321/20 (27 F 3240 1001 350 no 2000/270 1440/2134 autom. 14" 755/70 HL-AL 321/20 (27 F 3240 1001 350 no 3000/350 2420/2880 autom. 14" 755/70 HL-AL 321/200 (35 F 3740 1800 350 no 2000/270 1425/210 matom. 14" 755/70 HL-AL 321/200 (35 F 3740 1800 350 no 2000/270 1425/718 autom. 14" 755/70 HL-AL 311800 (35 F 3740 1800 350 no 3000/350 2292/278 autom. 14" 755/70 HL-AL 411800 (35 F 4140 1000 350 no 2000/350 | | | | | | | | | - | | | yes |
| HAL 3016/20 /27 F 3060 1650 300 no 2000/27/00 1578/267 yes/autom. 12" 650 Professional Class HAL 3218/20 /27 3240 1800 350 no 2000/27/00 14/4/2146 autom. 14" 700/40 Professional Class HAL 3218/20 /27 3240 1800 350 no 2000/27/00 14/4/2146 autom. 14" 700/740 HAL 3218/20 /25 5 3240 1800 350 no 3000/3500 24/0/2860 autom. 14" 705/70 HAL 3718/20 /25 77 3740 1800 350 no 2000/2700 14/92/19 autom. 14" 700/740 HAL 3718/20 /27 F 3740 1800 350 no 2000/2700 14/92/19 autom. 14" 750/770 HAL 3718/20 /27 F 3740 1800 350 no 2000/2700 2080/280 2210/286 autom. 14" 740/740 HAL 4118/27 4140 1800 350 no 2000/350 2217/27 autom. 14" | | | | | | - | | | - | | | yes |
| HH., 17H2-F Series HA. 3218/20 /27 3240 1800 350 no 2000/2700 1440/2134 autom. 14* 700/740 Professional Class HA. 3218/20 /27 F 3240 1800 350 no 3000/3500 241/2817 autom. 14* 755/770 HA. 3218/20 /27 F 3740 1800 350 no 3000/3500 240/2801 autom. 14* 755/770 HA. 3718/20 /27 3740 1800 350 no 2000/2700 1429/210 autom. 14* 756/770 HA. 3718/20 /27 3740 1800 350 no 3000/3500 240/2810 autom. 14* 756/770 HA. 3718/20 /27 3740 1800 350 no 3000/3500 240/28210 autom. 13* 660/70 HA. 418/27 4140 1800 350 no 3000/3500 2207/275 autom. 13* 660/77 HA. 418/27 4140 1800 350 no 3000/3500 2279/275 autom. 13* 660/77 HA. 4121/207 </td <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>-</td> <td></td> <td></td> <td>yes</td> | | | | | | | | | - | | | yes |
| Professional Class HL-AL 3218/20/27 F 3240 100 350 no 2000/270 14/41/16 withm 13" 660 HL-AL 3218/00/35 F 3240 1800 350 no 3000/350 24/07/280 autom. 14" 560/070 HL-AL 3718/20/27 F 3740 1800 350 no 2000/270 14/32/120 autom. 14" 755/770 HL-AL 3718/20/27 F 3740 1800 350 no 2000/270 14/32/18 autom. 14" 755/770 HL-AL 3718/20/27 F 3740 1800 350 no 3000/350 236/282 autom. 14" 755/770 HL-AL 4118/27 4140 1800 350 no 2007 2035 autom. 14" 755/770 HL-AL 4118/27 4140 1800 350 no 2000/350 2239/279 autom. 14" 755/770 HL-AL 4118/27 4140 1800 350 no 3000/550 2239/279 autom. </td <td></td> <td>HL-AL 3016/20 /27 F</td> <td>3060</td> <td>1650</td> <td>300</td> <td>no</td> <td>2000/2700</td> <td>1578/2267</td> <td>yes/autom.</td> <td>12"</td> <td>650</td> <td>yes</td> | | HL-AL 3016/20 /27 F | 3060 | 1650 | 300 | no | 2000/2700 | 1578/2267 | yes/autom. | 12" | 650 | yes |
| Hi-AL 3218/30 /35 32.40 1800 350 no 3000/3500 2401/2897 autom. 14* 755/770 Hi-A. 3218/30 /35 32.40 1800 350 no 3000/3500 2400/2860 autom. 13* 660/870 Hi-A. 3218/20 /27 F 37.40 1800 350 no 2000/2700 1419/2119 autom. 14* 755/770 Hi-A. 3718/20 /27 S7.40 1800 350 no 2000/2700 1419/2119 autom. 14* 755/770 Hi-A. 3718/20 /27 S7.40 1800 350 no 3000/3500 2208/282 autom. 14* 755/770 Hi-A. 4118/27 4140 1800 350 no 3000/3500 2208/2783 autom. 14* 755/770 Hi-A. 4118/27 4140 1800 350 no 3000/3500 2208/2783 autom. 14* 755/770 Hi-A. 4118/20 /25 F 4140 1800 350 no 3000/3500 2208/2783 autom. 14* 755/770 Hi-A. 4118/20 /25 F 4140 2 | IL-/HL-F Series | HL-AL 3218/20 /27 | 3240 | 1800 | 350 | no | 2000/2700 | 1440/2134 | autom. | 14" | 700/740 | yes |
| HL-AL 3218300,755 3240 1800 350 no 3000/3500 240/2890 autom. 14" 755/770 HL-AL 321830,755 3740 1800 350 no 2000/2700 14/32:112 autom. 14" 756/770 HL-AL 371820,727 3740 1800 350 no 2000/2700 14/32:112 autom. 14" 756/770 HL-AL 371820,727 3740 1800 350 no 3000/3500 2410/296 autom. 14" 756/770 HL-AL 371830,735 3740 1800 350 no 3000/3500 22073 autom. 14" 760/740 HL-AL 4118027 4140 1800 350 no 3000/3500 22073 autom. 14" 765/770 HL-AL 411807,755 4140 1800 350 no 3000/3500 2238/2789 autom. 14" 755/770 HL-AL 411807,755 4140 1800 350 no 2000 2031 autom. 14" 755/770 HL-AL 411807,055 4140 2100 350 no | Professional Class | HL-AL 3218/20 /27 F | 3240 | 1800 | 350 | no | 2000/2700 | 1424/2146 | autom. | 13" | 660 | yes |
| HL-AL 3718/20./27 3740 1800 350 no 2000/2700 1425/2102 autor. 14" 700/740 HL-AL 3718/20./27 F 3740 1800 350 no 2000/2700 1419/2119 autor. 14" 705/740 HL-AL 3718/20./35 F 3740 1800 350 no 3000/3500 2410/2306 autor. 14" 755/740 HL-AL 4118/27 4140 1800 350 no 2000 2069 autor. 14" 755/770 HL-AL 4118/27 4140 1800 350 no 3000/3500 2232/275 autor. 14" 755/770 HL-AL 4118/20./35 F 4140 1800 350 no 3000/3500 2232/275 autor. 14" 765/770 HL-AL 4118/20./35 F 4140 2100 350 no 3000/3500 2304/2740 autor. 14" 765/770 HL-AL 4118/20./35 F 4140 2100 350 no 3000/3500 2304/2740 autor. 14" 765/770 HL-AL 4121/30./35 F 5140 1800 350 <td></td> <td>HL-AL 3218/30 /35</td> <td>3240</td> <td>1800</td> <td>350</td> <td>no</td> <td>3000/3500</td> <td>2401/2897</td> <td>autom.</td> <td>14"</td> <td>755/770</td> <td>yes</td> | | HL-AL 3218/30 /35 | 3240 | 1800 | 350 | no | 3000/3500 | 2401/2897 | autom. | 14" | 755/770 | yes |
| HL-AL 3718/20, 27 F 3740 1800 350 no 2000/2700 1419/2119 autom. 13" 660 HL-AL 3718/00, 055 3740 1800 350 no 3000/3500 2396/2892 autom. 14" 755/770 HL-AL 3718/00, 735 F 3740 1800 350 no 2000/3500 2410/2966 autom. 14" 755/770 HL-AL 4118/27 F 4140 1800 350 no 2700 2068 autom. 14" 765/770 HL-AL 4118/30,75 4140 1800 350 no 3000/3500 2279/2775 autom. 14" 755/770 HL-AL 4118/30,75 4140 1800 350 no 3000/3500 2039/270 2038 autom. 14" 740 HL-AL 4121/27 4140 2100 350 no 2000/2500 2038 autom. 14" 755/770 HL-AL 4121/30/35 4140 2100 350 no 3000/3500 203/273 autom. 13" 660/670 HL-AL 4121/30/35 5140 1800 350 | | HL-AL 3218/30 /35 F | 3240 | 1800 | 350 | no | 3000/3500 | 2420/2860 | autom. | 13" | 660/670 | yes |
| HL-AL, 2718/30 /35 3740 1800 350 no 3000/3500 2396/2892 autom. 14" 755/770 HL-AL, 3718/30 /35 F 3740 1800 350 no 3000/3500 2410/2906 autom. 14" 660/670 HL-AL, 4118/27 F 4140 1800 350 no 2700 2069 autom. 14" 740 HL-AL, 4118/27 F 4140 1800 350 no 3000/3500 2279/2775 autom. 14" 755/770 HL-AL, 4118/27 A 4140 1800 350 no 3000/3500 2239/278 autom. 14" 755/770 HL-AL, 4121/27 F 4140 2100 350 no 3000/3500 230/2740 autom. 14" 755/70 HL-AL, 4121/30 /35 F 4140 2100 350 no 3000/3500 230/2740 autom. 14" 755/70 HL-AL, 5118/27 F 5140 1800 350 yes 2700 1831 autom. 14" 755/70 HL-AL, 5118/20 /35 F 5140 1800 350 yes | | HL-AL 3718/20 /27 | 3740 | 1800 | 350 | no | 2000/2700 | 1425/2102 | autom. | 14" | 700/740 | yes |
| HL-AL 3718/30 /35 F 3740 1800 350 no 3000/3500 2410/2906 autom. 13" 660/670 HL-AL 4118/27 4140 1800 350 no 2700 2069 autom. 14" 740 HL-AL 4118/20 /35 4140 1800 350 no 2075 autom. 14" 755/770 HL-AL 4118/30 /35 F 4140 1800 350 no 3000/3500 223/2789 autom. 14" 755/770 HL-AL 4118/30 /35 F 4140 2100 350 no 2000/3500 230/2789 autom. 14" 755/770 HL-AL 412/27 4140 2100 350 no 3000/3500 230/2740 autom. 14" 755/770 HL-AL 412/27 4140 2100 350 no 3000/3500 230/7753 autom. 14" 755/770 HL-AL 412/27 5140 1800 350 no 3000/3500 230/7753 autom. 14" 755/770 HL-AL 412/200 /35 F 5140 1800 350 no 3000/3500 | | HL-AL 3718/20 /27 F | 3740 | 1800 | 350 | no | 2000/2700 | 1419/2119 | autom. | 13" | 660 | yes |
| HL-AL 4118/27 4140 1800 350 no 2700 2069 autom. 14" 740 HL-AL 4118/27 F 4140 1800 350 no 22075 autom. 13" 660 HL-AL 4118/20 /35 F 4140 1800 350 no 3000/3500 2297/275 autom. 14" 760/770 HL-AL 4112/07 4140 2100 350 no 2003 autom. 14" 740 HL-AL 412/127 F 4140 2100 350 no 20032 autom. 14" 750/70 HL-AL 412/120 /35 F 4140 2100 350 no 3000/3500 2304/2740 autom. 14" 750/70 HL-AL 412/30 /35 F 4140 2100 350 no 3000/3500 2304/2740 autom. 14" 750/70 HL-AL 5118/07 /35 F 5140 1800 350 yes 2700 1831 autom. 14" 760/70 HL-AL 5118/07 /35 F 5140 1800 350 yes 3000/3500 2126/2818 autom. 14" | | HL-AL 3718/30 /35 | 3740 | 1800 | 350 | no | 3000/3500 | 2396/2892 | autom. | 14" | 755/770 | yes |
| HL-ALH140/2 F41401800350no27002075autom.13"660HL-AL4118/30 /3541401800350no3000/35002279/2775autom.14"755/770HL-AL4118/30 /35 F41401800350no3000/35002293/2789autom.14"740HL-AL4121/2741402100350no27002032autom.14"740HL-AL4121/20 /3541402100350no3000/35002304/2740autom.14"755/770HL-AL4121/30 /35 F41402100350no3000/35002304/2740autom.14"755/770HL-AL1121/30 /35 F41402100350no3000/35002304/2740autom.14"760HL-AL5118/27 F51401800350yes27001831autom.14"756/70HL-AL5118/27 F51401800350yes3000/35002102/2618autom.14"756/70HL-AL5121/27 F51401800350yes27001831autom.14"756/70HL-AL5121/07 F51401800350yes27001837autom.14"756/70HL-AL5121/07 F51402100350yes27001837autom.14"756/70HL-AL5121/07 F51402100350 <td></td> <td>HL-AL 3718/30 /35 F</td> <td>3740</td> <td>1800</td> <td>350</td> <td>no</td> <td>3000/3500</td> <td>2410/2906</td> <td>autom.</td> <td>13"</td> <td>660/670</td> <td>yes</td> | | HL-AL 3718/30 /35 F | 3740 | 1800 | 350 | no | 3000/3500 | 2410/2906 | autom. | 13" | 660/670 | yes |
| HL-AL 4118/30 /35 4140 1800 350 no 3000/3500 2279/2775 autom. 14" 755/700 HL-AL 4118/30 /35 F 4140 1800 350 no 3000/3500 2239/2789 autom. 13" 660/670 HL-AL 4121/27 4140 2100 350 no 2700 2038 autom. 13" 660/670 HL-AL 4121/27 F 4140 2100 350 no 2700 2032 autom. 13" 660/670 HL-AL 4121/20 /35 F 4140 2100 350 no 3000/3500 230/2740 autom. 14" 740 HL-AL 5118/27 5140 1800 350 yes 2700 1901 autom. 14" 740 HL-AL 5118/27 F 5140 1800 350 yes 2700 181 autom. 13" 660/670 HL-AL 5118/30 /35 F 5140 1800 350 yes 2700 181 autom. 14" 740 HL-AL 5118/30 /35 F 5140 1800 350 yes 3000/3500 2 | | HL-AL 4118/27 | 4140 | 1800 | 350 | no | 2700 | 2069 | autom. | 14" | 740 | yes |
| HL-AL 4118/30 /35 F41401800350no3000/35002293/2789autom.13"660/670HL-AL 4121/2741402100350no27002038autom.14"740HL-AL 4121/27 F41402100350no3000/35002304/2740autom.13"660/670HL-AL 4121/30 /35 F41402100350no3000/35002304/2740autom.14"740HL-AL 4121/30 /35 F41402100350no3000/35002307/2753autom.14"740HL-AL 4121/30 /35 F51401800350yes27001901autom.14"740HL-AL 5118/27 F51401800350yes27001831autom.14"740HL-AL 5118/27 F51401800350yes3000/35002108/2644autom.14"755/770HL-AL 5118/30 /35 F51401800350yes3000/35002108/2644autom.14"755/770HL-AL 5118/30 /35 F51402100350yes20001835autom.14"760/70HL-AL 5118/27 F51402100350yes2000/35002102/2618autom.14"755/770HL-AL 5118/30 /35 F51402100350yes3000/35002107/2550autom.14"755/770HL-AL 5121/27 F51402100350yes3000/35002107/2550autom.1 | | HL-AL 4118/27 F | 4140 | 1800 | 350 | no | 2700 | 2075 | autom. | 13" | 660 | yes |
| HL-AL 4121/2741402100350no27002038autom.14"740HL-AL 4121/27 F41402100350no27002032autom.13"660HL-AL 4121/30 /3541402100350no3000/35002304/2740autom.14"755/770HL-AL 4121/30 /35 F41402100350no3000/35002307/2753autom.13"660/670HL-AL 5118/27 F51401800350yes27001901autom.14"755/770HL-AL 5118/27 F51401800350yes27001831autom.14"755/770HL-AL 5118/27 F51401800350yes3000/35002108/2604autom.14"755/770HL-AL 5118/30 /35 F51401800350yes3000/35002122/2618autom.14"755/770HL-AL 5121/27 F51402100350yes3000/35002107/255autom.14"755/770HL-AL 5121/27 F51402100350yes3000/35002107/255autom.14"755/770HL-AL 5121/27 F51402100350yes3000/35002107/255autom.14"755/770HL-AL 5121/30 /35 F51402100350yes3000/35002126/2622autom.14"755/770HL-AL 5121/30 /35 F51402100350yes3000/35001893/2389autom. | | HL-AL 4118/30 /35 | 4140 | 1800 | 350 | no | 3000/3500 | 2279/2775 | autom. | 14" | 755/770 | yes |
| HL-AL 4121/27 F41402100350no27002032autom.13"660HL-AL 4121/30 /3541402100350no3000/35002304/2740autom.14"755/770HL-AL 4121/30 /35 F41402100350no3000/35002307/2753autom.13"660/670HL-AL 5118/2751401800350yes27001901autom.14"740HL-AL 5118/27 F51401800350yes27001831autom.14"755/770HL-AL 5118/20 /3551401800350yes3000/35002108/2604autom.14"755/770HL-AL 5118/30 /35 F51401800350yes3000/35002122/2618autom.14"760/70HL-AL 5121/2751402100350yes27001847autom.14"740HL-AL 5121/27 F51402100350yes27001847autom.14"755/770HL-AL 5121/27 F51402100350yes3000/35002107/2550autom.14"755/770HL-AL 5121/30 /35 F51402100350yes3000/35002107/2550autom.14"755/770HL-AL 5121/30 /35 F62402100350yes3000/3500216/2622autom.14"755/770HL-AL 5121/30 /35 F62402100350yes3000/3500216/2622autom.14"< | | HL-AL 4118/30 /35 F | 4140 | 1800 | 350 | no | 3000/3500 | 2293/2789 | autom. | 13" | 660/670 | yes |
| HL-AL 4121/27 F41402100350no27002032autom.13"660HL-AL 4121/30 /3541402100350no3000/35002304/2740autom.14"755/770HL-AL 4121/30 /35 F41402100350no3000/35002307/2753autom.13"660/670HL-AL 5118/2751401800350yes27001901autom.14"740HL-AL 5118/27 F51401800350yes27001831autom.14"755/770HL-AL 5118/30 /3551401800350yes3000/35002108/2604autom.14"755/770HL-AL 5118/30 /35 F51401800350yes3000/35002122/2618autom.14"740HL-AL 5121/2751402100350yes27001847autom.14"755/770HL-AL 5121/27 F51402100350yes27001835autom.14"755/770HL-AL 5121/27 F51402100350yes3000/35002107/2550autom.14"755/770HL-AL 5121/30 /35 F51402100350yes3000/35002107/2550autom.14"755/770HL-AL 5121/30 /35 F62402100350yes3000/35002107/2550autom.14"760/70HL-AL 6221/32 /35 F62402100350yes3000/3500216/2622autom.14" | | HL-AL 4121/27 | 4140 | 2100 | 350 | no | 2700 | 2038 | autom. | 14" | 740 | yes |
| HL-AL 4121/30 /3541402100350no3000/35002304/2740autom.14"755/770HL-AL 4121/30 /35 F41402100350no3000/35002307/2753autom.13"660/670HL-AL 5118/2751401800350yes27001901autom.14"740HL-AL 5118/27 F51401800350yes27001831autom.13"660/670HL-AL 5118/30 /3551401800350yes3000/35002108/2604autom.14"755/770HL-AL 512/30 /35 F51401800350yes3000/35002122/2618autom.14"760HL-AL 5121/2751402100350yes27001847autom.14"740HL-AL 5121/27 F51402100350yes27001835autom.14"760HL-AL 5121/27 F51402100350yes3000/35002107/2550autom.14"75/770HL-AL 5121/30 /35 F51402100350yes3000/35002126/622autom.14"75/770HL-AL 5121/30 /35 F61402100350yes3000/35002126/622autom.14"75/770HL-AL 6221/30 /35 F62402100350yes3000/3500126/2622autom.14"75/770HL-AL 6221/30 /35 F62402100350yes3000/3500189/2389autom.14"< | | | | | | | | | | | | yes |
| HL-AL 4121/30 /35 F41402100350no3000/35002307/2753autom.13"660/670HL-AL 5118/2751401800350yes27001901autom.14"740HL-AL 5118/27 F51401800350yes2000/35002108/2604autom.13"660/670HL-AL 5118/30 /3551401800350yes3000/35002122/2618autom.14"755/770HL-AL 5118/30 /35 F51401800350yes3000/35002122/2618autom.14"740HL-AL 5121/2751402100350yes27001847autom.14"740HL-AL 5121/27 F51402100350yes27001847autom.14"740HL-AL 5121/30 /35 F51402100350yes3000/35002107/2550autom.14"755/770HL-AL 5121/30 /35 F51402100350yes3000/35002126/2622autom.14"740HL-AL 521/30 /35 F51402100350yes3000/35002166/262autom.14"750/770HL-AL 5221/30 /35 F62402100350yes3000/3500183/2389autom.14"740HL-AL 6221/30 /35 F62402100350yes3000/3500183/2389autom.14"756/770HL-AL 6221/30 /35 F62402100350yes3000/3500183/2389autom. | | | | | | | | | | | | yes |
| HL-AL 5118/2751401800350yes27001901autom.14"740HL-AL 5118/27 F51401800350yes27001831autom.13"660HL-AL 5118/30 /35 F51401800350yes3000/35002108/2604autom.14"755/770HL-AL 5118/30 /35 F51401800350yes3000/35002122/2618autom.14"760HL-AL 5121/2751402100350yes27001847autom.14"740HL-AL 5121/27 F51402100350yes27001835autom.14"755/770HL-AL 5121/30 /35 F51402100350yes3000/35002107/2550autom.14"755/770HL-AL 5121/30 /35 F51402100350yes3000/35002102/2622autom.14"755/770HL-AL 6221/2762402100350yes27001594autom.14"740HL-AL 6221/2762402100350yes3000/3500189/2389autom.14"755/770HL-AL 6221/30 /35 F62402100350yes3000/3500189/2375autom.14"755/770HL-AL 6221/2762402100350yes3000/3500189/2389autom.14"755/770HL-AL 6224/2762402100350yes3000/3500189/2375autom.14"755/770 <td></td> <td>yes</td> | | | | | | | | | | | | yes |
| HL-AL 5118/27 F51401800350yes27001831autom.13"660HL-AL 5118/30 /3551401800350yes3000/35002108/2604autom.14"755/770HL-AL 5118/30 /35 F51401800350yes3000/35002122/2618autom.13"660/670HL-AL 5121/2751402100350yes27001847autom.14"740HL-AL 5121/27 F51402100350yes27001835autom.13"660/670HL-AL 5121/37 /5551402100350yes3000/35002107/2550autom.14"755/770HL-AL 5121/30 /35 F51402100350yes3000/35002126/2622autom.14"755/770HL-AL 6221/2762402100350yes3000/35002126/2622autom.14"740HL-AL 6221/30 /35 F62402100350yes3000/35001893/2389autom.14"740HL-AL 6221/30 /35 F62402100350yes3000/35001893/2389autom.14"755/770HL-AL 6221/30 /35 F62402100350yes3000/35001893/2389autom.14"755/770HL-AL 6221/30 /35 F62402100350yes3000/35001893/2389autom.14"755/770HL-AL 6221/30 /35 F62402100350yes3000/35001879/2375 <td rowspan="10"></td> <td></td> <td>yes</td> | | | | | | | | | | | | yes |
| HL-AL 5118/30 /3551401800350yes300//35002108/2604autom.14"755/770HL-AL 5118/30 /35 F51401800350yes3000/35002122/2618autom.13"660/670HL-AL 5121/2751402100350yes27001847autom.14"740HL-AL 5121/27 F51402100350yes27001835autom.13"660HL-AL 5121/37 /3551402100350yes3000/35002107/2550autom.14"755/770HL-AL 5121/30 /35 F51402100350yes3000/35002126/2622autom.14"755/770HL-AL 6221/2762402100350yes3000/35001893/2389autom.14"740HL-AL 6221/30 /35 F62402100350yes3000/35001893/2389autom.14"740HL-AL 6221/37 /35 F62402100350yes3000/35001893/2389autom.14"755/770HL-AL 6221/30 /35 F62402100350yes3000/35001893/2389autom.14"755/770HL-AL 6221/30 /35 F62402100350yes3000/35001893/2389autom.14"755/770HL-AL 6221/30 /35 F62402100350yes27001581autom.14"755/770HL-AL 6221/30 /3562402100350yes35002299au | | | | | | | | | | | - | yes |
| HL-AL 5118/30 /35 F51401800350yes3000/35002122/2618autom.13"660/670HL-AL 5121/2751402100350yes27001847autom.14"740HL-AL 5121/27 F51402100350yes27001835autom.13"660/670HL-AL 5121/30 /3551402100350yes3000/35002107/2550autom.14"755/770HL-AL 5121/30 /35 F51402100350yes3000/35002126/2622autom.13"660/670HL-AL 6221/2762402100350yes27001594autom.14"740HL-AL 6221/30 /35 F62402100350yes3000/35001893/2389autom.14"755/770HL-AL 6221/30 /35 F62402100350yes3000/35001893/2375autom.14"755/770HL-AL 6221/30 /35 F62402100350yes3000/35001893/2375autom.14"755/770HL-AL 6224/2762402450350yes35002299autom.14"755HL-AL 6224/3562402450350yes35002299autom.14"770 | | | | | | - | | | | | | yes |
| HL-AL 5121/2751402100350yes27001847autom.14"740HL-AL 5121/27 F51402100350yes27001835autom.13"660HL-AL 5121/30 /3551402100350yes3000/35002107/2550autom.14"755/770HL-AL 5121/30 /35 F51402100350yes3000/35002126/2622autom.13"660/670HL-AL 6221/2762402100350yes3000/35001893/2389autom.14"740HL-AL 6221/30 /35 F62402100350yes3000/35001893/2389autom.14"740HL-AL 6221/30 /35 F62402100350yes3000/35001893/2389autom.14"755/770HL-AL 6221/30 /35 F62402100350yes3000/35001893/2389autom.14"755/770HL-AL 6221/30 /35 F62402100350yes3000/35001893/2389autom.14"755/770HL-AL 6221/30 /35 F62402100350yes27001581autom.14"755/770HL-AL 6224/2762402450350yes35002299autom.14"755HL-AL 6224/3562402450350yes35002299autom.14"770 | | | | | | | | | | | | yes |
| HL-AL 5121/27 F51402100350yes27001835autom.13"660HL-AL 5121/30 /3551402100350yes3000/35002107/2550autom.14"755/770HL-AL 5121/30 /35 F51402100350yes3000/35002126/2622autom.13"660/670HL-AL 6221/2762402100350yes27001594autom.14"740HL-AL 6221/30 /35 F62402100350yes3000/35001893/2389autom.13"660/670HL-AL 6221/30 /35 F62402100350yes3000/35001893/2389autom.14"755/770HL-AL 6221/30 /35 F62402100350yes3000/35001879/2375autom.14"755/770HL-AL 6221/30 /35 F62402450350yes27001581autom.14"755/770HL-AL 6221/30 /35 F62402450350yes35002299autom.14"755 | | | | | | | | | | | | yes |
| HL-AL 5121/30 /3551402100350yes3000/35002107/2550autom.14"755/770HL-AL 5121/30 /35 F51402100350yes3000/35002126/2622autom.13"660/670HL-AL 6221/2762402100350yes27001594autom.14"740HL-AL 6221/30 /35 F62402100350yes3000/35001893/2389autom.13"660/670HL-AL 6221/30 /35 F62402100350yes3000/35001893/2389autom.14"755/770HL-AL 6221/30 /35 F62402100350yes3000/35001879/2375autom.14"755/770HL-AL 6224/2762402450350yes27001581autom.14"755HL-AL 6224/3562402450350yes35002299autom.14"770 | | | | | | - | | - | | | - | yes |
| HL-AL 5121/30 /35 F51402100350yes3000/35002126/2622autom.13"660/670HL-AL 6221/2762402100350yes27001594autom.14"740HL-AL 6221/30 /35 F62402100350yes3000/35001893/2389autom.13"660/670HL-AL 6221/30 /35 F62402100350yes3000/35001893/2389autom.13"660/670HL-AL 6221/30 /3562402100350yes3000/35001879/2375autom.14"755/770HL-AL 6224/2762402450350yes27001581autom.14"755HL-AL 6224/3562402450350yes35002299autom.14"770 | | | | | | | | | | | | yes |
| HL-AL 6221/2762402100350yes27001594autom.14"740HL-AL 6221/30 /35 F62402100350yes3000/35001893/2389autom.13"660/670HL-AL 6221/30 /3562402100350yes3000/35001879/2375autom.14"755/770HL-AL 6224/2762402450350yes27001581autom.14"755HL-AL 6224/3562402450350yes35002299autom.14"770 | | | | | | | | | | | | yes |
| HL-AL 6221/30 /35 F62402100350yes3000/35001893/2389autom.13"660/670HL-AL 6221/30 /3562402100350yes3000/35001879/2375autom.14"755/770HL-AL 6224/2762402450350yes27001581autom.14"755HL-AL 6224/3562402450350yes35002299autom.14"770 | | | | | | - | | | | | | - |
| HL-AL 6221/30 /3562402100350yes3000/35001879/2375autom.14"755/770HL-AL 6224/2762402450350yes27001581autom.14"755HL-AL 6224/3562402450350yes35002299autom.14"770 | | | | | | | | | | | | yes |
| HL-AL 6224/2762402450350yes27001581autom.14"755HL-AL 6224/3562402450350yes35002299autom.14"770 | | | | | | | | | | | | yes |
| HL-AL 6224/35 6240 2450 350 yes 3500 2299 autom. 14" 770 | | | | | | - | | | | | | yes |
| | | | | | | | | | | | | yes |
| HL-AL 6224/35 F 6240 2450 350 ves 3500 2292 autom. 13" 670 | | | | | | | | | | | | yes |
| | | HL-AL 6224/35 F | 6240 | 2450 | 350 | yes | 3500 | 2292 | autom. | 13" | 670 | yes |

Changes to design and equipment reserved. The unladen weight (basic weight) is increased when accessories are added. The payload is reduced as a result. Weights and dimensions approximate, changes possible with options, some illustrations in this brochure show versions with accessories. Please refer to our price list for a full catalogue of accessories. Your Böckmann partners will be pleased to help you!

-

-

Your local Böckmann partner looks forward to meeting you:



FIRST CLASS TRANSPORT

Böckmann Fahrzeugwerke GmbH
49688 Lastrup, Germany
Phone +49 (0) 4472 895-0
Fax +49 (0) 4472 895-550
info@boeckmann.com
www.boeckmann.com

f facebook.com/anhangersterklasse
Image: Start and the star